

# ECOTECH TAURUS SERIES

ECO-SOLVENT PRINTERS

UP TO  
2880  
dpi

UP TO  
366  
sq.ft./h



Speed, quality and production savings in eco-solvent printing

●● PARADIGM  
●● IMAGING GROUP

Paradigm Imaging Group - [www.paradigmimaging.com](http://www.paradigmimaging.com)

3010 Red Hill Avenue, Costa Mesa, CA 92626 | 888.221.SCAN(7226)


The ECOTECH TAURUS SERIES Eco-Solvent Printers provide both cutting-edge technology and lower production costs in easy to operate models. **The 126" wide ECOTECH TAURUS 320 features 2 Epson DX5 printheads with resolutions as high as 2,880 dpi to achieve picture perfect quality.**

With support for both local and remote printing, high speed data transfers up to 480Mb/sec efficiently process the most demanding graphic applications. Reliable production is guaranteed by the double column vertical balance guide rail, automatic intelligent print head cleaning and moistening, as well as by the enhanced feathering print mode.

The high capacity bulk ink system lowers your cost by utilizing 1 liter CMYK inks with 500 ml reserve cartridges. The front heaters and drying fans quickly dry jobs for continuous production when utilizing the printer's automatic take-up system.



Heater temperature controllers

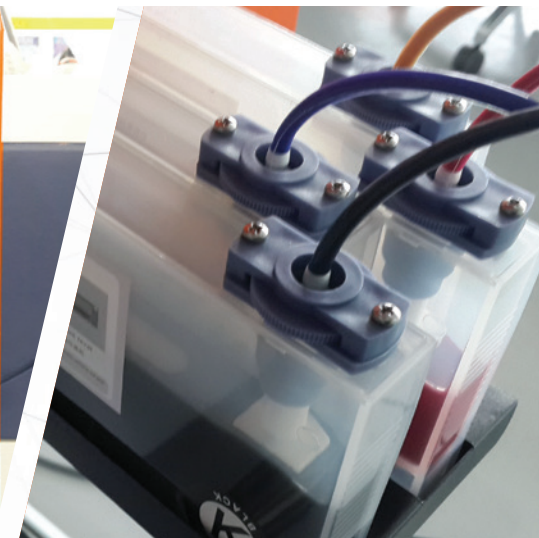

Ink cartridges with 1 liter capacity per color

**EPSON**  
EXCEED YOUR VISION

Up to 2 Epson DX5 Printhead  
1440 nozzles



**1 Year Limited Warranty**

**PARADIGM**  
IMAGING GROUP

ECOTECH TAURUS 180				ECOTECH TAURUS 180S		ECOTECH TAURUS 320	
Printhead				1440 nozzles · variable dots · 7 / 14 / 21 picoliters			
Number of Printheads				1		2	
Resolution				Up to 1440 DPI		Up to 2880 DPI	
Ink				Eco-Solvent   4 colors (CMYK)   1 liter per color Bulk System			
Maximum printing width				70" (1,800 mm)		126" (3,200 mm)	
Auto feeding/take-up system				Roll or sheet			
Media				Banner, mesh, vinyl, perforated vinyl, canvas, textile, polyester fabric, etc			
Print Speed	Production	4 passes	161 sq.ft./h (15 m²/h)		301 sq.ft./h (28 m²/h)		366 sq.ft./h (34 m²/h)
	Quality	6 passes	129 sq.ft./h (12 m²/h)		215 sq.ft./h (20 m²/h)		269 sq.ft./h (25 m²/h)
	High Quality	8 passes	86 sq.ft./h (8 m²/h)		150 sq.ft./h (14 m²/h)		194 sq.ft./h (18 m²/h)
Cleaning system				Auto cleaning			
Heating and drying system				Pre and front heaters and drying fans			
RIP Software				MainTop RIP. FlexiPrint 12 Optional			
Interface				Network interface RJ45			
Voltage				AC 220 V · 50 / 60 Hz			
Equipment dimensions				111" x 39" x 50" ((2,820 x 990 x 1,260 mm)		179" x 39" x 62" (4,550 x 1,000 x 1,600 mm)	
Package dimensions				111" x 27" x 27" ( 2,760 x 700 x 700 mm)		191" x 28" x 35" ( 4,860 x 700 x 890 mm)	
Equipment weight				111" x 27" x 27" ( 2,760 x 700 x 700 mm)		Net: 1,366 lb (620 kg) Gross: 1,653 lb (750 kg)	